

SEALING

- SEMI OR FULLY AUTOMATIC
- UNIFORM OR RANDOM CASE SIZES
- TOP AND BOTTOM SEALING
- SIDE OR VERTICAL SEALING
- ACCESSORIES



Case sealers for random case sizes

T-55 case sealer with automatic adjustment for case size

Top and bottom closure.

The automatic height and width adjustment makes the T-55 ideal in packing lines where case sizes vary, e.g. in the dispatch department of warehouses. Two operators can work simultaneously on either side of the packing table.

The T-55 can operate as a fully automatic top and bottom sealer provided the top flaps of the case are closed by means of a control label or a small piece of tape.

Basic models

T-55 and T-55 Maxi. Both models are available with high pillars for extra tall cases.

- Easy tape and dispenser replacement.
- Easy to maintain with low maintenance and spare parts costs.
- Wide range of accessory equipment.
- Electro-galvanised or stainless steel finish.



Item no.


Model examples (use the configurator to design your specific model)	Item no.
T-55 5-5-7	437756713
T-55 5-8-7	437756913
T-55 Maxi 7-5-7	437752173
T-55 Maxi 7-8-7	437752373

All measurements are in mm. Subject to alteration.




Case sealers for random case sizes

Specifications	T-55 5-5-7	T-55 5-8-7	T-55 Maxi 7-5-7	T-55 Maxi 7-8-7
Case dimensions*				
Max. (LxWxH) mm	∞ x 510 x 510	∞ x 510 x 810	∞ x 720 x 510	∞ x 720 x 810
Min. (LxWxH) mm	160 x 95 x 85	160 x 95 x 220	160 x 150 x 115	160 x 150 x 220
Tape overlap				
70 mm	●	●	●	●
50 mm	○	○	○	○
Tape width				
25 - 30 mm	○	○	○	○
38 - 50 mm	●	●	○	○
50 - 75 mm	○	○	●	●
Side drives				
Height 50 mm	●	●	○	○
Height 80 mm	○	○	●	●
Working height max./min.				
920 - 820 mm	○	○	○	○
820 - 720 mm	○	○	○	○
720 - 620 mm	●	●	●	●
620 - 520 mm	○	○	○	○
520 - 420 mm	○	○	○	○
Weight kg	175	165	170	170
Capacity*	Max. 16 cases/ min.			
Electric specifications	3 x 230/400 V, 50-60 Hz, or 3 x 415/460 V, 50-60 Hz. Connected load 0.3 kW. Other specifications available upon request.			
Tape diameter	Max. 385 mm.			
Air consumption	Max. 8.5 l at 6 bar per case.			
● Standard ○ Optional*Depending on the construction and quality of the case. Subject to alteration.				



High quality tape dispensers.



Pillar stop for maximum efficiency.

Case sealers for random case sizes



Accessories


- ▶ Tape dispensers for case sealers - infeed from the right
- ▶ Spare parts for tape dispensers
- ▶ Braked castors
- ▶ Side pressure guide for T-55 and T-602

The model T-55 is for packing stations that handle many different sizes of case.


Machine dimensions

T-55 5-5-7/5-8-7


T-55 7-5-7/7-8-7




910



900




910



1110

All measurements are in mm. A= working height. Subject to alteration.

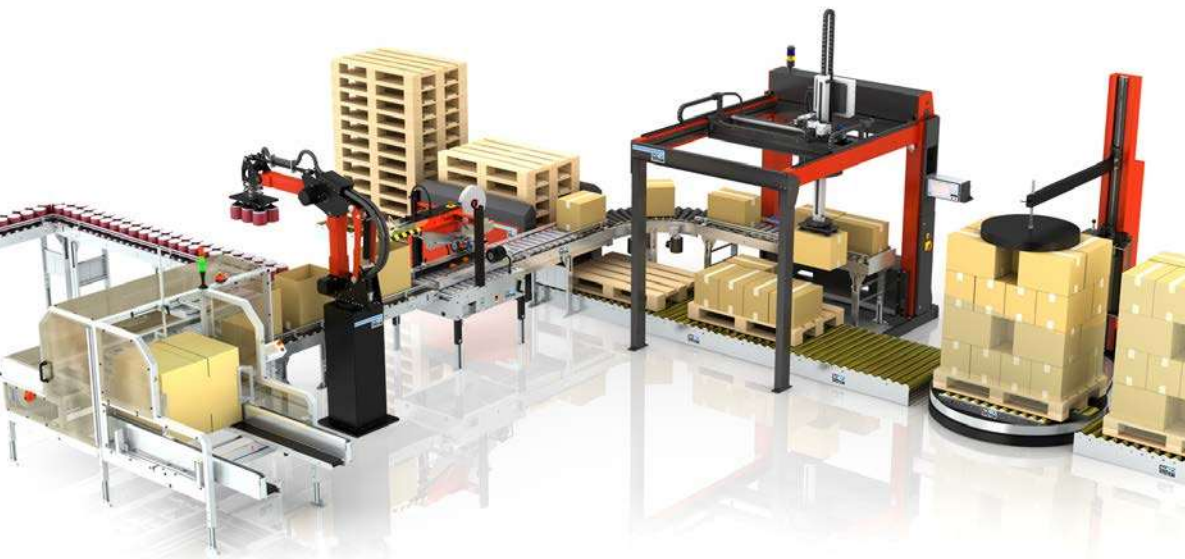

The SOCO SYSTEM

From case erecting to pallet securing

The SOCO SYSTEM product range handles cases, plastic crates, trays, pallets, and many of your products.

The SOCO SYSTEM product range is designed to increase efficiency and eliminate physically strenuous work functions.

One system – one supplier

There are many advantages of full product compatibility; less paperwork and no time wasted in adapting products from different suppliers.

Meet your future requirements

Add modules and functionality, relocate modules, or whatever fits your future needs.

Call us, mail us, or visit us at www.socosystem.com

Your local SOCO SYSTEM dealer:



Staudi Oy
 Jan Staudinger
 Mikkelänkallio 5
 02770 Espoo
 Tel+358-9-8558879
 Mobile +358-44-5234400
 Email jan.staudinger@staudi.fi
www.staudi.fi

Head office:
SOCO SYSTEM A/S
 Helgeshøj Allé 16D
 DK-2630 Taastrup
 Denmark
 Tel +45 43 52 55 66
 Fax +45 43 52 81 16
info@socosystem.com
www.socosystem.com



Würth,
France



Nilfisk,
Denmark



Ciba,
Switzerland



Flextronics,
Germany



Umpac,
Sweden



Coop,
Denmark



JAS HENNESSY & CO,
France



Altmark Käserei,
Germany